COILS 36 mm x Ø 13 mm


UDA12024AS ÷ UDV12230DW

COIL **UDA** **Coil housing material:** PA - Black polyamide - class F (155°C)
UDV **Coil housing material:** PET - Black Polyethylene - class H (180°C)

Winding: In class H
Electrical connections: With connector EN 175301-803 paragraph 5.3.1
Protection degree IP 65 EN 60529 (DIN 40050)

COIL HOUSING AND COIL FORMER MATERIAL ARE MADE BY 100% VIRGIN MATERIAL.



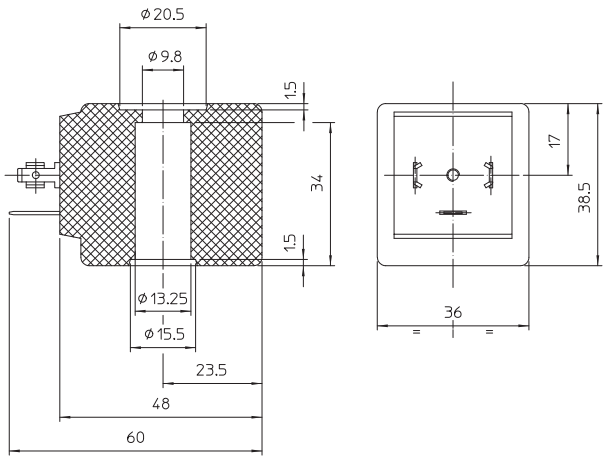

MATERIAL ON STOCK:

Code	Power	Voltages Frequency	ED	Ambient temperature	Approvals
UDA12024AS	23 VA	24 ~ 50	100%	- 10°C + 40°C	**CE**
UDA12024CS	12 W	24 ⎓	100%	- 10°C + 40°C	**CE**
UDA12110DS	23 VA	110 ~ 50/60	100%	- 10°C + 40°C	**CE**
UDA12230AS	23 VA	230 ~ 50	100%	- 10°C + 40°C	**CE**
UDV12024CY	12 W	24 ⎓	100%	- 20°C + 60°C	**CE - UL - CSA - VDE**
UDV12112DW	23 VA	110/120 ~ 50/60	100%	- 20°C + 40°C	**CE - UL - CSA**
UDV12230AY	17 VA	230 ~ 50 240 ~ 60	100%	- 20°C + 60°C	**CE - UL - CSA - VDE**
UDV12230DW	25 VA	230 ~ 50/60	100%	- 20°C + 40°C	**CE - UL - CSA**

NOMINAL VOLTAGES TOLERANCES: DC + 10% - 5%
AC + 10% - 15%

The power values are indicative, as they change as a function of magnetic kit used and of the application sector of reference | Other voltages and power absorptions available on demand and for quantities.

The “ODE ” reserves the right to carry out technical and aesthetic modifications without prior notice.