

DEUBLIN


Rotating Union D Series for Water and Hydraulic Oil Service, DN 8 - 40


- monoflow design
- self-supported rotating union
- for hydraulic oil and water
- for swivel applications and high media pressure e.g. for power steering applications on earth moving equipment or hose reels
- steel housing and end cap
- stainless steel rotor
- can be adapted for other media upon request

For further information please contact ***DEUBLIN*** or your local representative.

Operating Data

Max. Hydraulic/Water Pressure	6,530 PSI	450 bar
Max. Speed	20 RPM	20 min^{-1}
Max. Temperature	120 °C	> 120 °C consult *DEUBLIN*

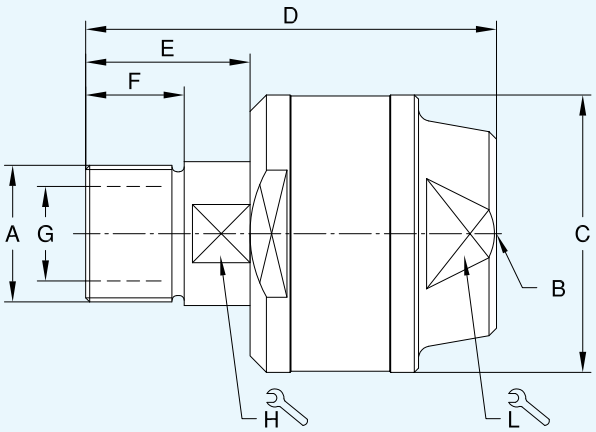

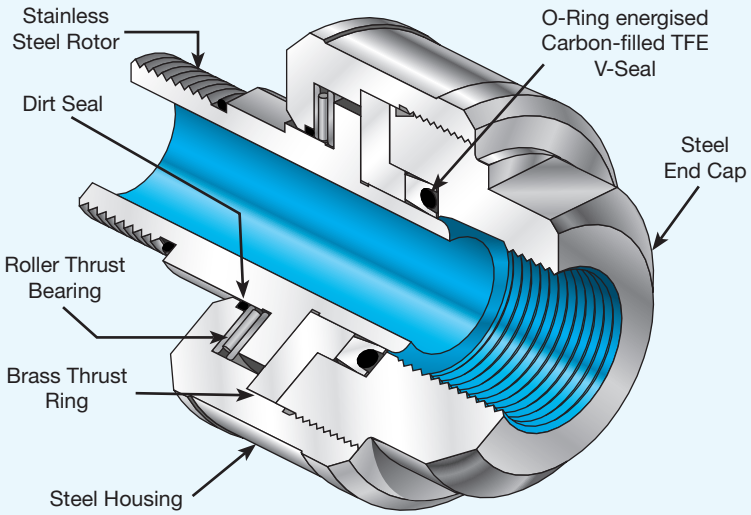

DN	B	Ordering No.	A Rotor Connections	C ø	D	E	F	G ø	H	L	kg
10	G 3/8	D10-003-210	G 3/8 RH	44	70	25	15	10	14	28	0,4
		D10-003-211	G 3/8 LH								
15	G 1/2	D12-003-210	G 1/2 RH	56	82	32	20	12	22	38	0,8
		D12-003-211	G 1/2 LH								
20	G 3/4	D20-003-210	G 3/4 RH	62	90	34	20	18	27	42	1,0
		D20-003-211	G 3/4 LH								
25	G 1	D25-003-210	G 1 RH	68	100	40	24	23	32	48	1,3
		D25-003-211	G 1 LH								
32	G 1 1/4	D32-003-210	G 1 1/4 RH	80	108	43	25	30	42	58	1,9
		D32-003-211	G 1 1/4 LH								
40	G 1 1/2	D40-003-210	G 1 1/2 RH	88	114	44	26	38	46	62	3,0
		D40-003-211	G 1 1/2 LH								