


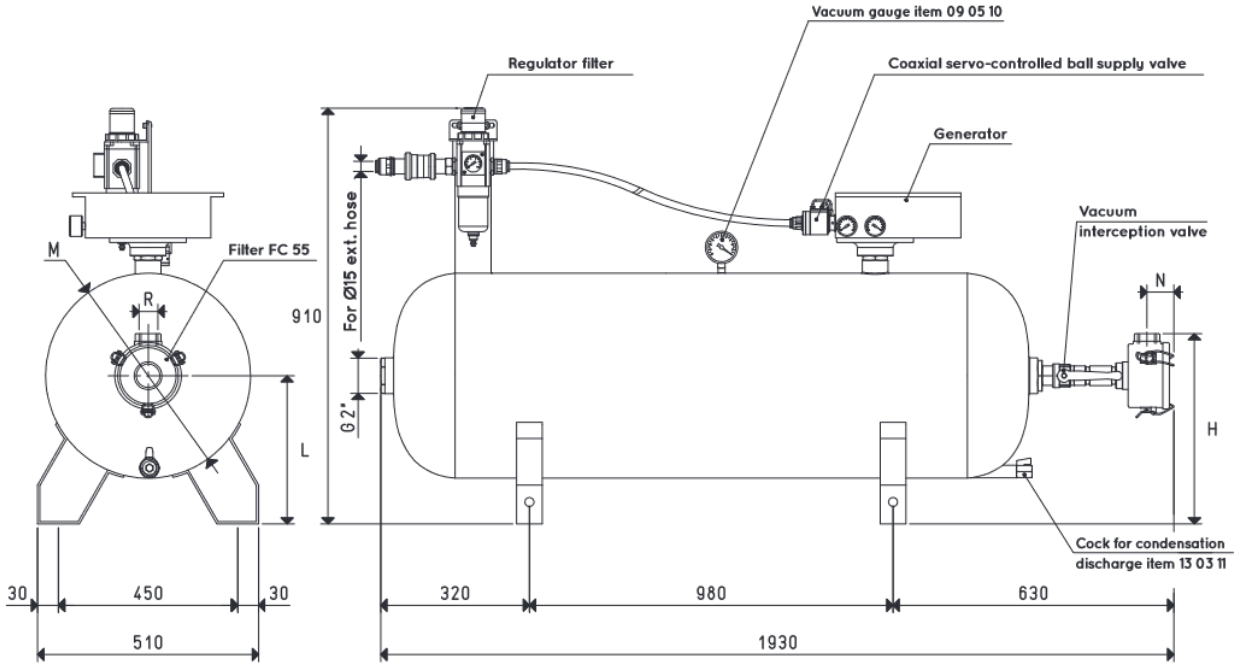

Item	Tank	Generator	Pneumatic switchgear	H	L	M	N	R	Weight
	Litres	item	item			Ø		Ø	Kg
DOP 300 PVP 300 MD	300	PVP 300 MDR ES	DOP 150 90	440	340	500	45	G2"	41.2

Note: Vacuum generator supply must be carried out with non-lubricated compressed air, 5 micron filtration, in accordance with standard **ISO 8573-1 class 4**.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity) inch = $\frac{mm}{25.4}$; pounds = $\frac{g}{453.6} = \frac{Kg}{0.4536}$ Adapters for GAS - NPT threading available on page 1.130