
SPIRALI IN POLIESTERE HTR CON TERMINALI DIRITTI
HTR POLYESTER SPIRALS WITH STRAIGHT TERMINALS

SCHEDA TECNICA - SPIRALI IN POLIESTERE HTR CON TERMINALI DIRITTI
DATA SHEET - HTR POLYESTER SPIRALS WITH STRAIGHT TERMINALS

	LUNGHEZZA *LENGTH*						5 m			7,5 m			10 m			12 m			15 m			30 m		
Codice *Code*	D (mm)	d (mm)	De (mm)	Di (mm)	Lt1 (mm)	Lt2 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)
SHC42XY	4	2	50	42	150	150	117	417	2500	184	484	3750	250	550	5000	304	604	6000	384	684	7500	784	1084	15000
SHC64XY	6	4	66	54	150	150	141	441	2500	222	522	3750	303	603	5000	368	668	6000	465	765	7500	950	1250	15000
SHC86XY	8	6	88	72	150	150	141	441	2500	222	522	3750	303	603	5000	368	668	6000	465	765	7500	950	1250	15000
SHC108XY	10	8	106	86	150	150	151	451	2500	237	537	3750	323	623	5000	392	692	6000	495	795	7500	1010	1310	15000
SHC1210XY	12	10	130	106	150	150	145	445	2500	227	527	3750	310	610	5000	376	676	6000	475	775	7500	970	1270	15000

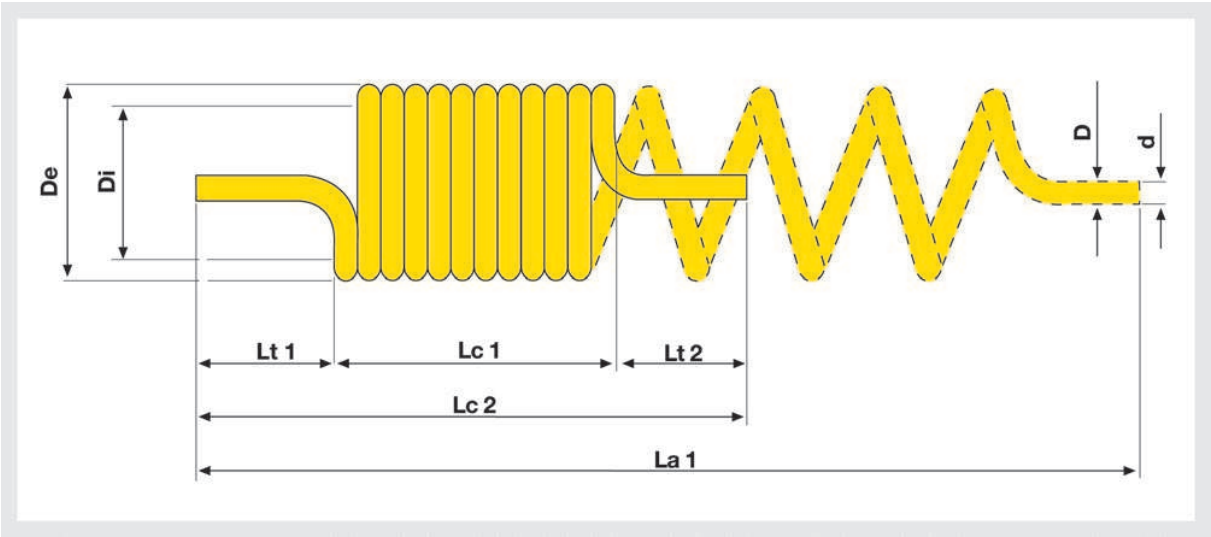

NB: Nel codice compare una X, che corrisponde alla sigla dei colori previsti: NERO (N), BLU (B), ARANCIO (A); ed una Y, che corrisponde alla lunghezza della spirale.
ESEMPIO CODICE: SHC1210A15 - Spirale HTR con codoli 12x10 ARANCIO da 15 m.
Temperature di utilizzo: da -20°C a +100°C.
Per fluidi a base acquosa temperatura massima di esercizio +70°C.
PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

NB: In the code there is an X, which corresponds to the abbreviation of the available colours: BLACK (N), BLUE (B), and ORANGE (A); and a Y, which corresponds to the length of the spiral.
EXAMPLE: HTR Spiral with straight terminals 12x10 ORANGE in lengths of 15 m. Cod. SHC1210A15.
Working temperature: from -20°C to +100°C.
Max. working temperature of fluids containing water +70°C.
PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.