
SPIRALI IN POLIAMMIDE PA12 CON TERMINALI DIRITTI
POLYAMIDE PA12 SPIRALS WITH STRAIGHT TERMINALS

SCHEDA TECNICA - SPIRALI IN POLIAMMIDE PA12 CON TERMINALI DIRITTI
DATA SHEET - POLYAMIDE PA12 SPIRALS WITH STRAIGHT TERMINALS

	LUNGHEZZA *LENGTH*						5 m			7,5 m			10 m			12 m			15 m			30 m		
Codice *Code*	D (mm)	d (mm)	De (mm)	Di (mm)	Lt1 (mm)	Lt2 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)	Lc1 (mm)	Lc2 (mm)	La1 (mm)
SCA42XY	4	2	50	42	150	150	120	420	2500	190	490	3750	258	558	5000	313	613	6000	395	695	7500	805	1105	15000
SCA64XY	6	4	64	52	150	150	146	446	2500	230	530	3750	313	613	5000	380	680	6000	480	780	7500	980	1280	15000
SCA86XY	8	6	86	70	150	150	146	446	2500	230	530	3750	313	613	5000	380	680	6000	480	780	7500	980	1280	15000
SCA108XY	10	8	102	82	150	150	155	455	2500	242	542	3750	330	630	5000	400	700	6000	505	805	7500	1030	1330	15000
SCA1210XY	12	10	126	102	150	150	155	455	2500	242	542	3750	330	630	5000	400	700	6000	505	805	7500	1030	1330	15000

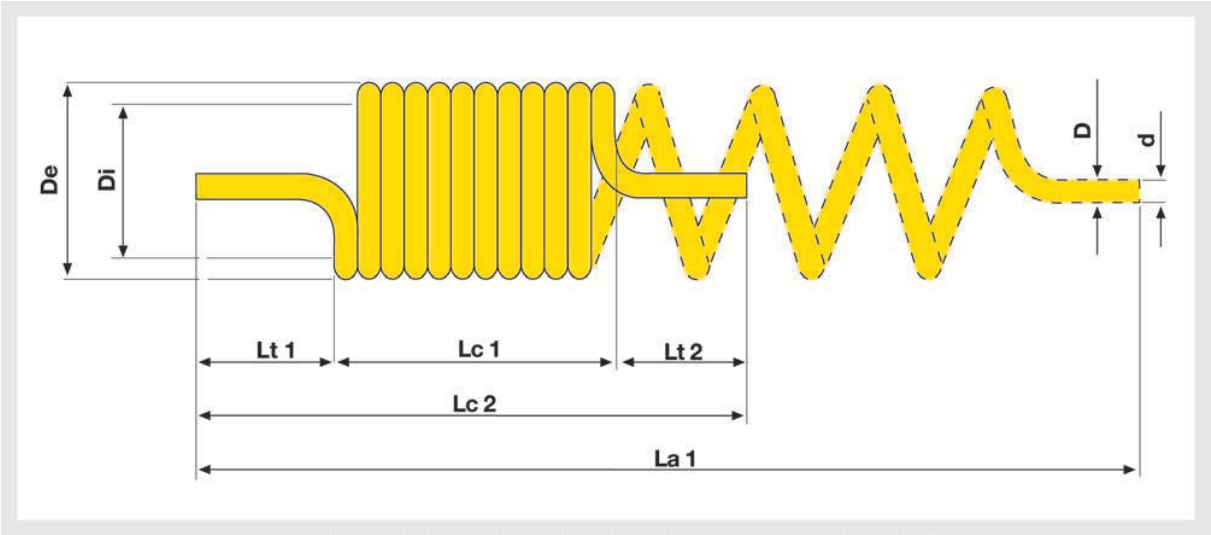

NB: Nel codice compare una X, bisogna sostituirla con la lettera del colore desiderato: BLU (B), ed ARANCIO (A), a richiesta altri colori; ed una Y, che corrisponde alla lunghezza della spirale.
ESEMPIO CODICE: SCA1210A15 - Spirale PA12 con codoli 12x10 ARANCIO da 15 m.
Temperature di utilizzo: da -20°C a +70°C.
Per fluidi a base acquosa temperatura massima di esercizio +70°C.
PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

NB: There is an X in the code. This should be replaced with the letter representing the colour required: BLUE (B), and ORANGE (A), with other colours on request; and a Y, which corresponds to the length of the spiral.
CODE EXAMPLE: SCA1210A15 - PA12 Spiral with straight terminals 12x10 ORANGE in lengths of 15 m.
Working temperature: from -20°C to +80°C.
Max. working temperature of fluids containing water +70°C.
PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.