
SPIRALI IN POLIAMMIDE PA12
POLYAMIDE PA12 SPIRALS

SCHEDA TECNICA - SPIRALI IN POLIAMMIDE PA12
DATA SHEET - POLYAMIDE PA12 SPIRALS

	LUNGHEZZA *LENGTH*				5 m		7,5 m		10 m		12 m		15 m		20 m		24 m		30 m	
Codice *Code*	D (mm)	d (mm)	De (mm)	Di (mm)	Lc (mm)	La (mm)	Lc (mm)	La (mm)	Lc (mm)	La (mm)	Lc (mm)	La (mm)	Lc (mm)	La (mm)	Lc (mm)	La (mm)	Lc (mm)	La (mm)	Lc (mm)	La (mm)
SA42XY	4	2	50	42	136	2500	205	3750	273	5000	328	6000	410	7500	546	10000	656	12000	820	15000
SA64XY	6	4	64	52	166	2500	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000
SA86XY	8	6	86	70	166	2500	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000
SA108XY	10	8	102	82	175	2500	262	3750	350	5000	420	6000	525	7500	700	10000	840	12000	1050	15000
SA1210XY	12	10	126	102	175	2500	262	3750	350	5000	420	6000	525	7500	700	10000	840	12000	1050	15000

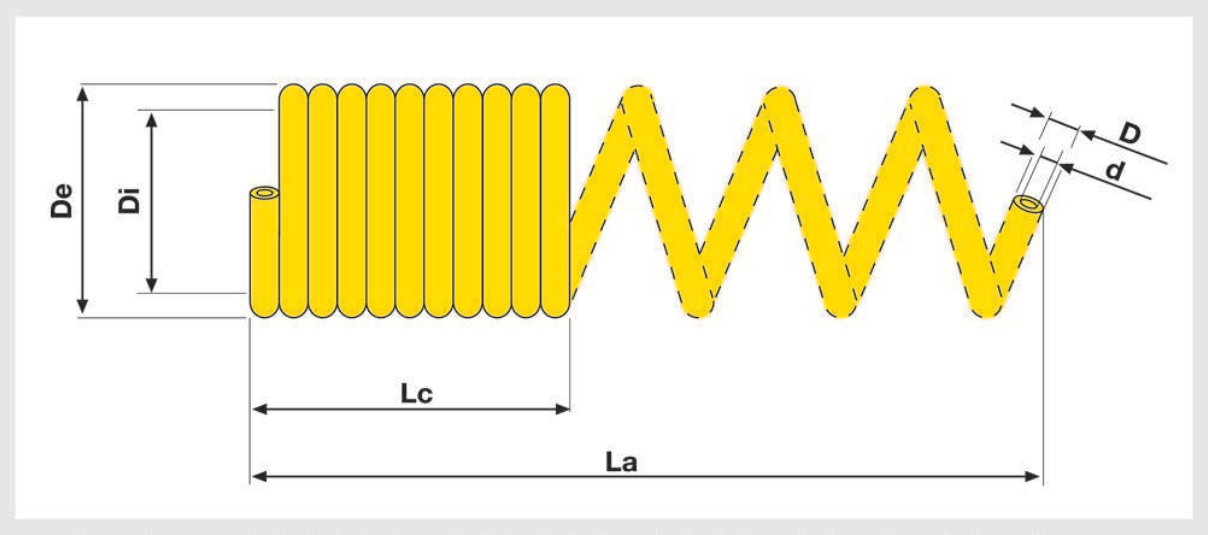

NB: Nel codice compare una X, bisogna sostituirla con la lettera del colore desiderato: BLU (B), ed ARANCIO (A), a richiesta altri colori;
ed una Y, che corrisponde alla lunghezza della spirale.
ESEMPIO CODICE: Cod. SA15125B10 - Spirale PA12 15x12,5 BLU da 10 m.
Temperature di utilizzo: da -20°C a +80°C.
Per fluidi a base acquosa temperatura massima di esercizio +70°C.
PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

NB: There is an X in the code. This should be replaced with the letter representing the colour required: BLUE (B), and ORANGE (A), with other colours on request; and a Y, which corresponds to the length of the spiral.
CODE EXAMPLE: SA15125B10 - PA12 Spiral 15x12,5 BLUE in lengths of 10 m.
Working temperature: from -20°C to +80°C.
Max. working temperature of fluids containing water +70°C.
PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.