
SPIRALI IN POLIAMMIDE AUTOESTINGUENTE
POLYAMIDE SELF-EXTINGUISHING SPIRALS

SCHEDA TECNICA - SPIRALI IN POLIAMMIDE AUTOESTINGUENTE *DATA SHEET - POLYAMIDE SELF-EXTINGUISHING SPIRALS*										
	LUNGHEZZA *LENGTH*				7,5 m		15 m		30 m	
Codice *Code*	D (mm)	d (mm)	De (mm)	Di (mm)	Lc (mm)	La (mm)	Lc (mm)	La (mm)	Lc (mm)	La (mm)
S64BYV2	6	4	64	52	250	3750	500	7500	1000	15000
S86BYV2	8	6	86	70	250	3750	500	7500	1000	15000
S108BYV2	10	8	102	82	262	3750	525	7500	1050	15000
S1210BYV2	12	10	126	102	262	3750	525	7500	1050	15000

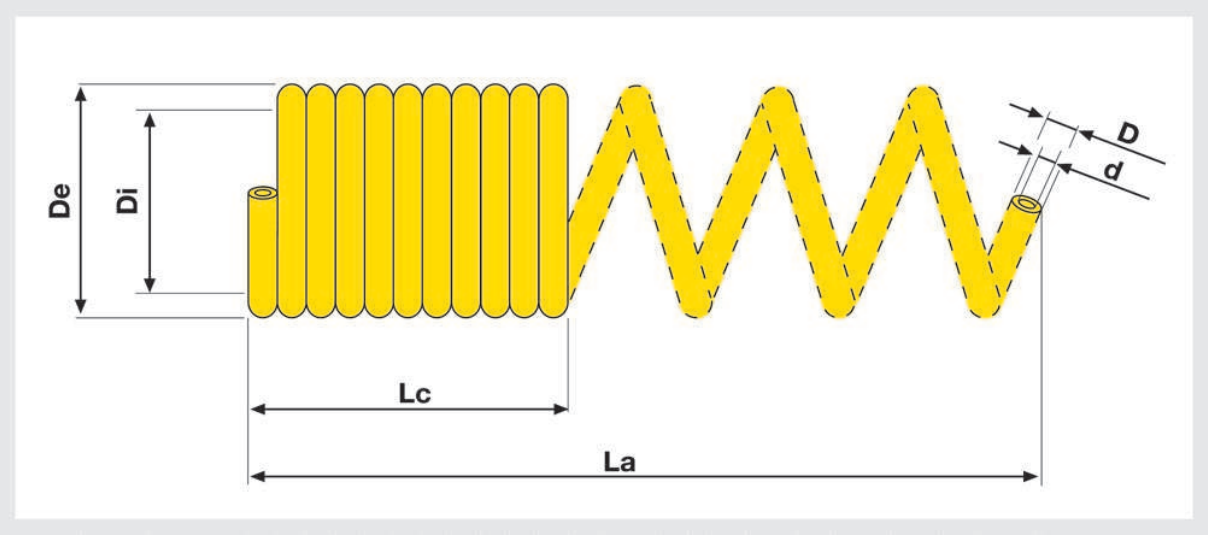

Tubo costruito con materia prima che soddisfa la norma UL94 grado V2.
Le spirali AUTOESTINGUENTI sono previste solo di colore BLU (B).
Nel codice compare una Y che corrisponde alla lunghezza della spirale.
ESEMPIO CODICE: S1210B30V2 - Spirale in PA AUTOESTINGUENTE 12x10 BLU da 30 m.
Temperature di utilizzo: da -20°C a +80°C.
Per fluidi a base acquosa temperatura massima di esercizio +70°C
PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.
Spirali prive di alogeni.

Tube manufactured with raw material that meets the UL94 standard V2 degree.
The SELF-EXTINGUISHING spirals are available only in BLUE (B).
In the code there is an Y, which corresponds to the length of the spiral.
CODE EXAMPLE: S1210B30V2 - PA SELF-EXTINGUISHING Spiral 12x10 BLUE in lengths of 30 m.
Working temperature: from -20°C to +80°C
Max. working temperature of fluids containing water +70°C.
PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.
Halogen-free spirals.