
# SPIRALI IN POLIURETANO
# *POLYURETHANE SPIRALS*

## SCHEDA TECNICA - SPIRALI IN POLIURETANO
## *DATA SHEET - POLYURETHANE SPIRALS*

| | LUNGHEZZA *LENGTH* | | | | 7,5 m | | 10 m | | 15 m | | 30 m | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Codice *Code* | D (mm) | d (mm) | De (mm) | Di (mm) | Lc (mm) | La (mm) | Lc (mm) | La (mm) | Lc (mm) | La (mm) | Lc (mm) | La (mm) |
| **SP42BY** | 4 | 2 | 38 | 30 | --- | --- | --- | --- | 545 | 7500 | 1090 | 15000 |
| **SP64BY** | 6 | 4 | 42 | 30 | 405 | 3750 | 540 | 5000 | 810 | 7500 | --- | --- |
| **SP64BY** | 6 | 4 | 56 | 44 | --- | --- | --- | --- | --- | --- | 1130 | 15000 |
| **SP85BY** | 8 | 5 | 46 | 30 | 525 | 3750 | 700 | 5000 | 1050 | 7500 | --- | --- |
| **SP86BY** | 8 | 6 | 76 | 60 | --- | --- | --- | --- | 605 | 7500 | 1210 | 15000 |
| **SP1065BY** | 10 | 6,5 | 60 | 40 | 500 | 3750 | 670 | 5000 | 1000 | 7500 | --- | --- |
| **SP1075BY** | 10 | 7,5 | 105 | 85 | --- | --- | --- | --- | 525 | 7500 | 1050 | 15000 |
| **SP128BY** | 12 | 8 | 84 | 60 | 420 | 3750 | 560 | 5000 | 840 | 7500 | --- | --- |
| **SP129BY** | 12 | 9 | 124 | 100 | --- | --- | --- | --- | 525 | 7500 | 1050 | 15000 |
| **SP1610BY** | 16 | 10 | 92 | 60 | 525 | 3750 | 700 | 5000 | 1050 | 7500 | --- | --- |

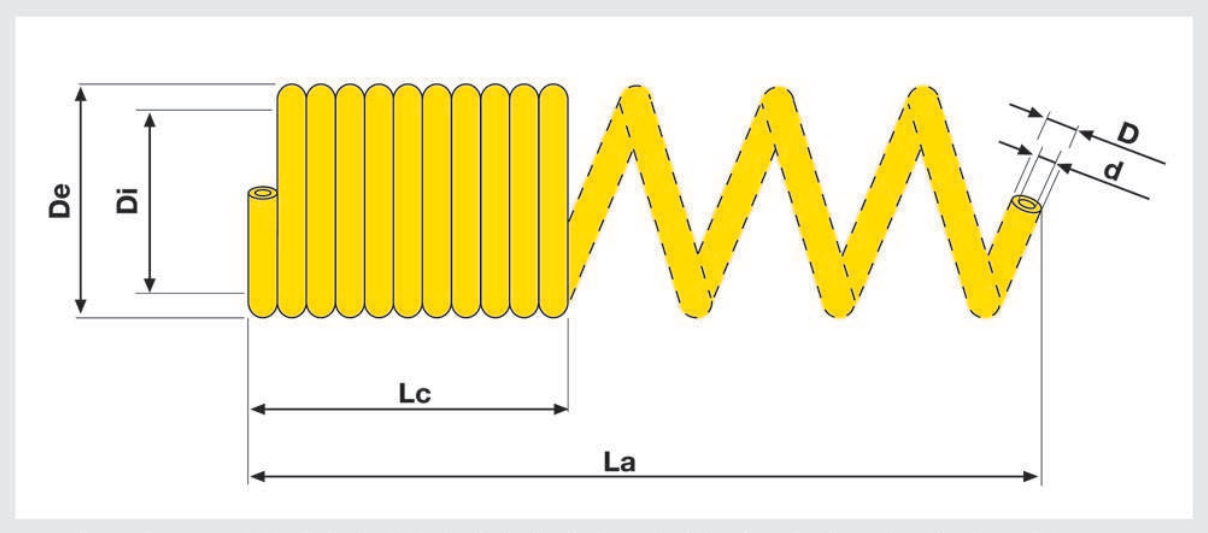


Queste spirali sono previste nel colore BLU (B), a richiesta altri colori. Nel codice compare una Y, che corrisponde alla lunghezza della spirale.
ESEMPIO CODICE: SP129B30 - Spirale POLIURETANO 12x9 BLU da 30 m.
Temperature di utilizzo: da -20°C a +60°C.
PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

*This spirals are available only in BLUE (B), or other colours on request. In the code there is an Y, which corresponds to the length of the spiral.*
*CODE EXAMPLE: SP129B30 - POLYURETHAN 12x9 BLUE Spiral in lengths of 30 m.*
*Working temperature: from -20°C to +60°C.*
*PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.*