THERMOPLASTIC TUBING AND HOSES

ZEC S.p.A.
Via Lungolorno 11 - 42052 Colorno (PR) - Italia
Tel. 0521 816631 - Fax 0521 816772
info@zecspa.com - www.zecspa.com

Capitale sociale: Euro 1.000.000
C.F., P.IVA e n. Iscr. Reg. Imprese Parma: IT01720400348
Numero REA: PR - 173914

Rilsan® PA11 HL Misting Series tubing

- LOW PRESSURE POLYAMIDE TUBING
- STANDARD FOR MISTING SYSTEMS IN INDUSTRIAL AND AGRICULTURAL USE
- COOLING SYSTEMS FOR COMMERCIAL USE



WATER HANDLING LOW PRESSURE AIR WATER-BASED FLUIDS WATER

TECHNICAL FEATURES

Metric

	ID	OD		T	1:3 WP	R MIN	g		m
Code	mm	mm	inch	mm	bar	mm	g/m	colours	m
T525*SR	2,50	5,00		1,25	93	32	14,9	N	100
T6353*SR	3,00	6,35	1/4"	1,675	95	40	24,8	T-N	100
T635385*SR	3,85	6,35	1/4"	1,25	68	45	20,2	N	100
T9525*SR	5,00	9,52	3/8"	2,26	87	120	52	N	100
T1277*SR	7,00	12,70	1/2"	2,85	87	120	89	N	50

T : Neutral N : Black

Rolls of 25mt - 50mt - 100mt and long lenght available on request.

TECHNICAL FEATURES


Working temperature:
from -40° to +100°C.
Working temperature of water-based fluids +70°C.

Temperature peaks: max +125°C.
If the duration or frequency of the peaks is significant, the hose lifespan may be reduced.

NB: There is an * in the code. This should be replaced with the color code of the tubing.
EXAMPLE: PA8 SR tubing 6x11 Neutral - Code T86TSR.

NB: Black hoses/tubing are recommended for outdoor applications.

PRESSURE CORRECTION FACTOR ACCORDING TO TEMPERATURE

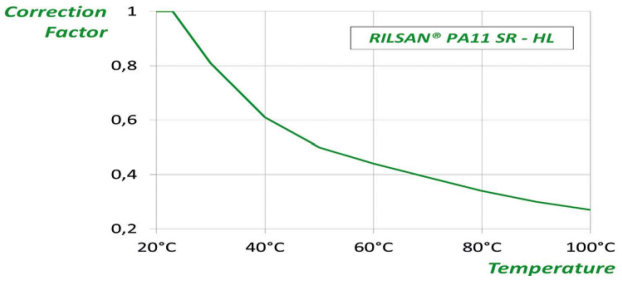

OPTIONAL

Color

Packing

Long Length

For any further information about the optional items, please contact the sales office ()

NORMATIVE

DIN 73378
DIN 74324